


ORAC Belgium - tel: +32 (0)59-80 32 52 - fax: +32 (0)59-80 28 10
www.oracdecor.com - e-mail: oracinfo@oracdecor.com

UM 502/04

ORAC FIX EXTRA - for ORAC DECOR only* - INTERIOR AND EXTERIOR USE



FX.210: 80ml tube
FX.200: 310ml cartridge

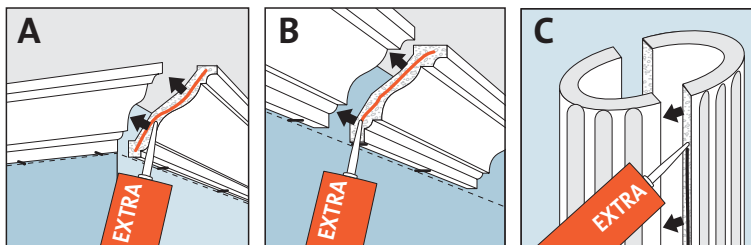

K.1001, K.1101, K.3001, K.3101
K.4001†

- base: Polyurethane (Diphenylmethane 4,4-diisocyanate)
- removable: Before hardening with acetone, after hardening with a sharp knife
- open time: ± 30 min.
- storage: between +5°C and +30°C (41°F-86°F)
- * not suitable for Orac Axxent.



FDP.100
caulking gun



HARMFUL
NOCIF
SCHADELIJK
MINDERGIJTIG
NOCIVO
NOCIVO

DIFENYLMETHAAN 4,4-DIISOCYANAAT

coverage/verbruik/consomation/Verbrauch:

A, B.

REF.	with/met/avec/mit 80 ml ORAC FIX EXTRA		REF.	with/met/avec/mit 80 ml ORAC FIX EXTRA		REF.	with/met/avec/mit 80 ml ORAC FIX EXTRA		REF.	with/met/avec/mit 80 ml ORAC FIX EXTRA	
P. 5021	70x	250x	P. 6020	48x	175x	C. 210	44x	150x	C. 211	26x	75x
P. 9050	70x	250x	P. 1020	48x	175x	C. 240	44x	150x	C. 304	26x	75x
C. 230	60x	225x	P. 2020	48x	175x	P. 7040	44x	150x	C. 201	24x	75x
P. 8030	60x	225x	P. 7030	48x	175x	P. 9010	44x	150x	C. 217	22x	75x
C. 214	60x	225x	C. 212	48x	175x	P. 7020	44x	150x	C. 302	22x	75x
P. 9040	50x	175x	P. 7010	48x	175x	C. 213	42x	150x	C. 308	20x	75x
P. 7060	50x	175x	C. 200	48x	175x	C. 401	40x	125x	C. 218	18x	50x
C. 322	50x	175x	P. 5020	46x	150x	C. 321	40x	125x	C. 301	18x	50x
C. 215	50x	175x	P. 8020	46x	150x	C. 333	40x	125x	P. 8040	16x	50x
			P. 5010	46x	150x	C. 220	40x	125x	C. 305	15x	50x
			P. 7070	46x	150x	C. 331	40x	125x	C. 216	15x	50x
			P. 3020	46x	150x	C. 400	36x	125x	C. 334	15x	50x
			P. 4020	46x	150x	C. 402	34x	100x	C. 332	14x	50x
			P. 7050	46x	150x	P. 9020	34x	100x	P. 7080	14x	50x
					C. 602	30x	100x	C. 901	10x	40x	
					P. 9080	30x	100x	C. 900	10x	40x	
					C. 303	30x	100x	C. 219	10x	40x	
								C. 422	10x	40x	
								C. 300	10x	40x	
								C. 307	10x	40x	

C.

REF:		
K.1001	1,5x	6x
K.1101	1,5x	6x
K.3001	1,5x	6x
K.3101	1,5x	6x

For full warranty coverage, always use ORAC Adhesives exclusively.



ORAC Belgium - tel: +32 (0)59-80 32 52 - fax: +32 (0)59-80 28 10
www.oracdecor.com - e-mail: oracinfo@oracdecor.com

UM 501/04

DECOFIX PRO - for ORAC DECOR and ORAC AXXENT - INTERIOR USE




FDP.600: 3,8kg plastic tub
FDP.500: 310ml cartridge




- *base*: synthetic copolymer dispersion
- *removable*: before hardening with water
- *open time*: ± 15 min.
- *storage*: between +5°C and +30°C (41°F - 86°F)
- *coverage*: **1 plastic tub of 3,8kg**: 48m / 155ft
1 cartridge of 310ml: 7 to 8m / 25ft
- **only for interior use**



FDP.100
caulking gun







Removable with
water before
hardening



Sandable
after hardening

examples of application:

See installation instructions of
'Flex', 'Columns', 'Doorpanels', ...
for detailed information



For full warranty coverage, always use ORAC Adhesives exclusively.

DECOFIX HYDRO - for ORAC DECOR and ORAC AXSENT - EXTERIOR USE



**FOR EXTERIOR USE
AND HUMID AREAS**



**POUR USAGE EXTÉRIEUR ET
ENVIRONNEMENTS HUMIDES**

**VOOR BUITENGEbruik EN
IN VOCHTIGE RUIIMTES**

**FÜR DEN AUßENBEREICH
UND FEUCHTRÄUME**

**PER USO ESTERNO
E ZONE UMIDE**

**PARA USO EN EXTERIOR
Y ZONAS HÚMEDAS**



- base: one component adhesive/sealant based on MS polymer
- removable: water +1% soap (remove before hardening)
- open time: ± 10min.
- storage: between +5°C and +30°C (41°F - 86°F)
- coverage: 1 cartridge of 290ml: 7 to 8m / 25ft





FDP.700: 290ml cartridge

FDP.100
caulking gun



- Do not use too much adhesive.
- In case of excess adhesive: excess can be removed (before hardening) with detergent (water containing appr. 1% soap).
- Joint can be filled with DecoFix Hydro.
- Smooth everything with detergent (water containing appr. 1% soap).
- Gebruik niet teveel lijm.
- In het geval van bovenmatige lijm: overtollige lijm kan verwijderd worden (alvorens te verharden) met zeepoplossing (water + ongeveer 1% zeep).
- De naad kan met DecoFix Hydro gevuld worden.
- Alles gladstrijken met zeepoplossing (water + ongeveer 1% zeep).
- N'employer pas trop de colle.
- En cas d' excès de colle; l'excès peut être enlevé (avant le durcissement) avec de l'eau savoneuse.
- Le joint peut être rempli avec DecoFix Hydro.
- Lissez tout avec de l'eau savoneuse.
- Benutzen Sie nicht zuviel Kleber.
- Im Fall von zuviel Kleber kann der überschüssige Kleber (vor dem Aushärten) mit Seifenlauge entfernt werden (Wasser mit ca. 1% Seife).
- Fuge kann mit dem DecoFix Hydro gefüllt und anschließend mit Seifenlauge geglättet werden (Wasser mit ca. 1% Seife).

examples of application:



See installation instructions of 'Flex', 'Columns', 'Doorpanels', ... for detailed information

For full warranty coverage, always use ORAC Adhesives exclusively.